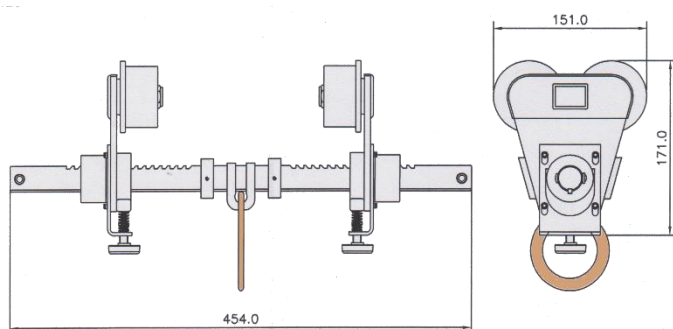
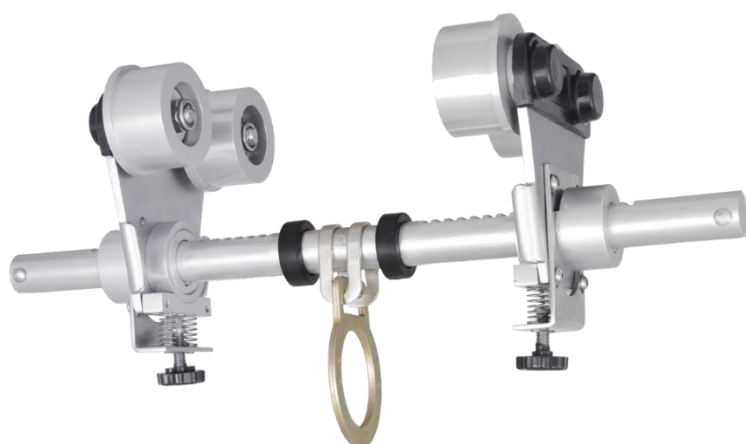


**Beam Anchor Trolley**

Anchoring on D-ring, inner diameter 55 mm, attached directly to the trolley bar.

Dimensions: Designed to be installed on beams whose width can vary from 80 to 250 mm.

Minimum breaking strength > 23 kN.

Compliance: Conforms to EN795:2012 Type B.

Materials:

Aluminium and Stainless steel

D-ring: Steel

D-ring diam.:		Weight:
55 mm		3.90 kg

KRATOS SAFETY

689 Chemin du Buclay
38540 Heyrieux (France)

Tel. : +33 (0)4 72 48 78 27

Fax. : +33 (0)4 72 48 58 32

www.kratossafety.com / info@kratossafety.com

HS CODE

83081010

CARTON SIZE / PIECES

60 x 40 x 24 cm / 2

AET (EU) N°2777/10796-02/E01-01

Satra Technology Europe Ltd, N° 2777,
 Bracetown Business Park, Clonee,
 Dublin, D15YN2P, Ireland

MODULE D IN14/14003

SGS United Kingdom Ltd., N°0120

Unit 202B, Worle Parkway,
 Weston-super-Mare, BS22 6WA, United Kingdom