




# TECHNICAL SHEET FA 20 503 02


## WEBBING RETRACTABLE FALL ARRESTER, LENGTH 2 M



*Lymphe-S2*

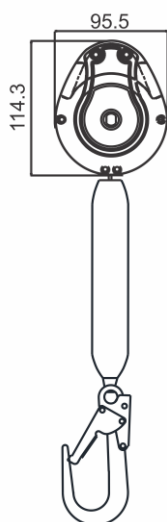

**OK FALL FACTOR 2**

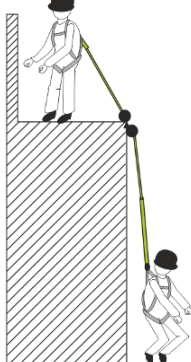

- Casing made up of high impact strength Polymer, to prevent breakage.
- Compact and light casing.
- Comes with a 20 mm webbing.
- Has a swivel attachment eye at the upper end.
- Internal braking mechanism to reduce the fall arrest force to less than 6 kN.
- External inbuilt energy absorber protected by a removable textile sleeve.

**Minimum breaking strength > 15 kN.**

**Connectors :** 1 steel screw-locking karabiner, opening 18 mm, ref. FA 50 101 17 and 1 aluminium rebar hook, opening 60 mm, ref. FA 50 208 60.

**Maxi weight for horizontal use:** 140 kg.

**Maxi weight for vertical use:** 140 kg.

**Compliance :** Conforms to EN 360:2002.

Tested and approved for horizontal use (work near sharp edge) according to VG 11.060 (Rev. 08 – 10/2014), as well as for a use in Fall Factor 2.

### Material of components:

Casings: PA 6

Webbing: Technora

Connectors: Steel and Aluminium

Length :		Weight:
2 m		1.25 kg

### KRATOS SAFETY

ZI les Portes du Dauphiné  
4, rue de l'Aigue  
69780 Saint Pierre de Chandieu – FRANCE

Tel : +33 (0)4 72 48 78 27

Fax : +33 (0)4 72 48 58 32

[www.kratossafety.com](http://www.kratossafety.com) / [info@kratossafety.com](mailto:info@kratossafety.com)

<b>HS CODE</b>
8428 90 90
<b>CARTON SIZE / PIECES</b>
60 x 40 x 24 cm / 6
<b>AET N°7626 Issue 1 Extension 2</b>
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
<b>ARTICLE 11 GB07/73551</b>
SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom